

Product category: ProSTUD® 20 Drywall Stud
Product name: 362PDS125-19 65ksi G40EQ - Punched
3-5/8" ProSTUD 20 (19mil)

Coating: G40EQ
Color coding: Pink

Geometric Properties

Web depth	3.625 in	Weight	0.448 lb/ft
Flange width	1.250 in	Punchout width	1.500 in
Stiffening lip	0.315 in	Punchout length	2.500 in
Design thickness	0.0200 in	Minimum thickness	0.0190 in
Yield stress, Fy	65 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.132 in ²
Moment of inertia (Ix)	0.266 in ⁴
Radius of gyration (Rx)	1.420 in
Gross moment of inertia (Iy)	0.027 in ⁴
Gross radius of gyration (Ry)	0.454 in

Effective Section Properties, Strong Axis

Effective area (Ae)	0.048 in ²
Moment of inertia for deflection (Ixe)	0.254 in ⁴
Section modulus (Sxe)	0.080 in ³
Allowable bending moment (Ma)	3,103 in-lbs
Allowable shear force in web (Unpunched) (Vag)	203 lb
Allowable shear force in web (Punched) (Vanet)	189 lb

Torsional Properties

St. Venant torsion constant (J x 1000)	0.0176 in ⁴
Warping constant (Cw)	0.072 in ⁶
Distance from shear center to neutral axis (Xo)	-0.876 in
Radii of gyration (Ro)	1.729 in
Torsional flexural constant (Beta)	0.743

Unbraced Length (Lu) 22.1 in

Notes:

- Calculated properties are based on AISI S100-07, North American Specification for Design of Cold-Formed Steel Structural Members and AISI S220-11, North American Standard for Cold-Formed Steel Framing - Nonstructural Members.
- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A7.2.
- Tabulated gross properties, including torsional properties, are based on full-unreduced cross section of the studs, away from punchouts.
- For deflection calculations, use the effective moment of inertia.
- Allowable moment includes cold work of forming.
- Allowable moment is taken as the lowest value based on local or distortional buckling. Distortional buckling strength is based on a k-phi = 0.
- East Coast Punch Pattern: Center of knockouts are 12" from the leading edge then 48" o.c.
- West Coast Punch Pattern: Center of knockouts are 24" from the leading edge then 24" o.c.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (up to 2 points) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a minimum recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.16 (Non-Structural Metal Framing)

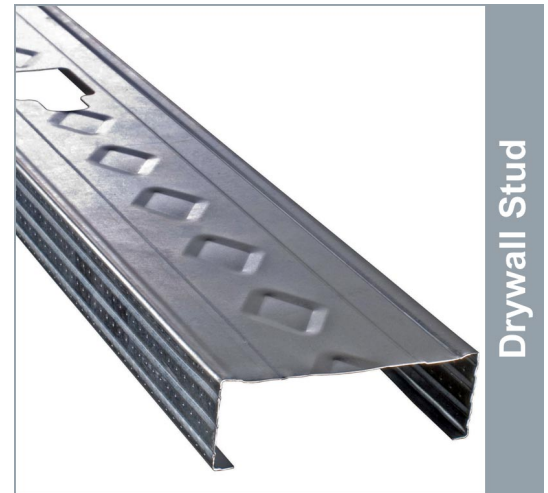

* Embossments in web are only placed on sections 2-1/2" and wider.

ASTM & Code Standards:

- AISI S100-07 & S220-11
- Meets or exceeds ASTM C645 & C754
- ASTM E119, E72 & E90
- ATI CCRR-0207
- LA RR 26019
- Multiple UL® Design Listing including: V438, V450 & U419
- SDS & Product Certification Information available at www.clarkdietrich.com
- U.S. Patent No. 9,010,070



CD-PDS © 02/16 ClarkDietrich Building Systems

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax:

Product category: ProSTUD® 20 Drywall Stud
Product name: 362PDS125-19 65ksi G40EQ - Punched
 3-5/8" ProSTUD 20 (19mil)

3-5/8" ProSTUD 20 (19mil) Drywall Stud - COMPOSITE Limiting Heights (AC86-2010)

(1 layer) 5/8" Type X Gypsum Board

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	23'-3"	18'-5"	16'-1"	20'-4"	16'-1"	14'-1"	18'-5"	14'-8"	12'-10"
16	21'-1"	16'-9"	14'-8"	18'-5"	14'-8"	12'-10"	16'-7"f	13'-4"	11'-7"
24	18'-5"	14'-8"	12'-10"	15'-8"f	12'-10"	11'-1"	13'-7"f	11'-7"	9'-11"

Composite Table Notes:

- Allowable composite limiting heights were determined in accordance with ICC-ES AC86-2010.
- Additional composite wall testing and analysis requirements of the SFIA Code Compliance Certification Program were observed.
- In accordance with current building codes and AISI design standards, the 1/3 Stress Increase for strength was not used.
- The composite limiting heights provided in the tables are based on a single layer of type X gypsum board from the following manufacturers: American, CertainTeed, Georgia Pacific, Lafarge, National, Temple Inland, and USG.
- The gypsum board must be applied full height in the vertical orientation to each stud flange and installed in accordance with ASTM C754-2004 using minimum No. 6 Type S Drywall screws spaced as listed below:
- Screws spaced a minimum of 16 in on-center to framing members spaced at 16 in or 12 in on-center.
- Screws spaced a minimum of 12 in on-center to framing members spaced at 24 in on-center.
- No fasteners are required for attaching the stud to the track except as detailed in ASTM C754-2008.
- Stud end bearing must be a minimum of 1 inch.
- f: Adjacent to the height value indicates that flexural stress controls the allowable wall height.
- s: Adjacent to the height value indicates that shear/end reaction controls the allowable wall height.

3-5/8" ProSTUD 20 (19mil) Drywall Stud - NON-COMPOSITE Limiting Heights (FULLY BRACED)

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	18'-10"	14'-11"	13'-0"	16'-5"	13'-0"	11'-5"	14'-5"	11'-10"	10'-4"
16	17'-1"	13'-7"	11'-10"	14'-5"	11'-10"	10'-4"	12'-5"	10'-9"	9'-5"
24	14'-5"	11'-10"	10'-4"	11'-9"	10'-4"	9'-0"	10'-2"	9'-5"	8'-3"

Non-Composite Table Notes:

- Heights are based on AISI S100-07, North American Specification, and AISI S220-11, North American Standard for Cold-Formed Steel Framing - Nonstructural Members, using steel properties alone.
- Above listed Non-Composite Limiting Heights are applicable when the unbraced length is less than or equal to Lu.
- Heights are limited by moment, deflection, shear, and web crippling (assuming 1" end reaction bearing).
- Heights labeled with a "*" can achieve higher heights by using end-bearing stiffeners. See full ProSTUD non-composite charts at clarkdietrich.com.

CD-PDS-LH © 02/16 ClarkDietrich Building Systems

Project Information

 Name:
 Address:

Contractor Information

 Name:
 Contact:
 Phone:
 Fax:

Architect Information

 Name:
 Contact:
 Phone:
 Fax: